


Use 5 and 1/2 inch loop of elastic thread. Attach to top forward pin with two half hitches. To load, wrap very tightly from top pin to bottom pin then over the top pin back to the pivot pin and back forward to the screw/silly putty timer.

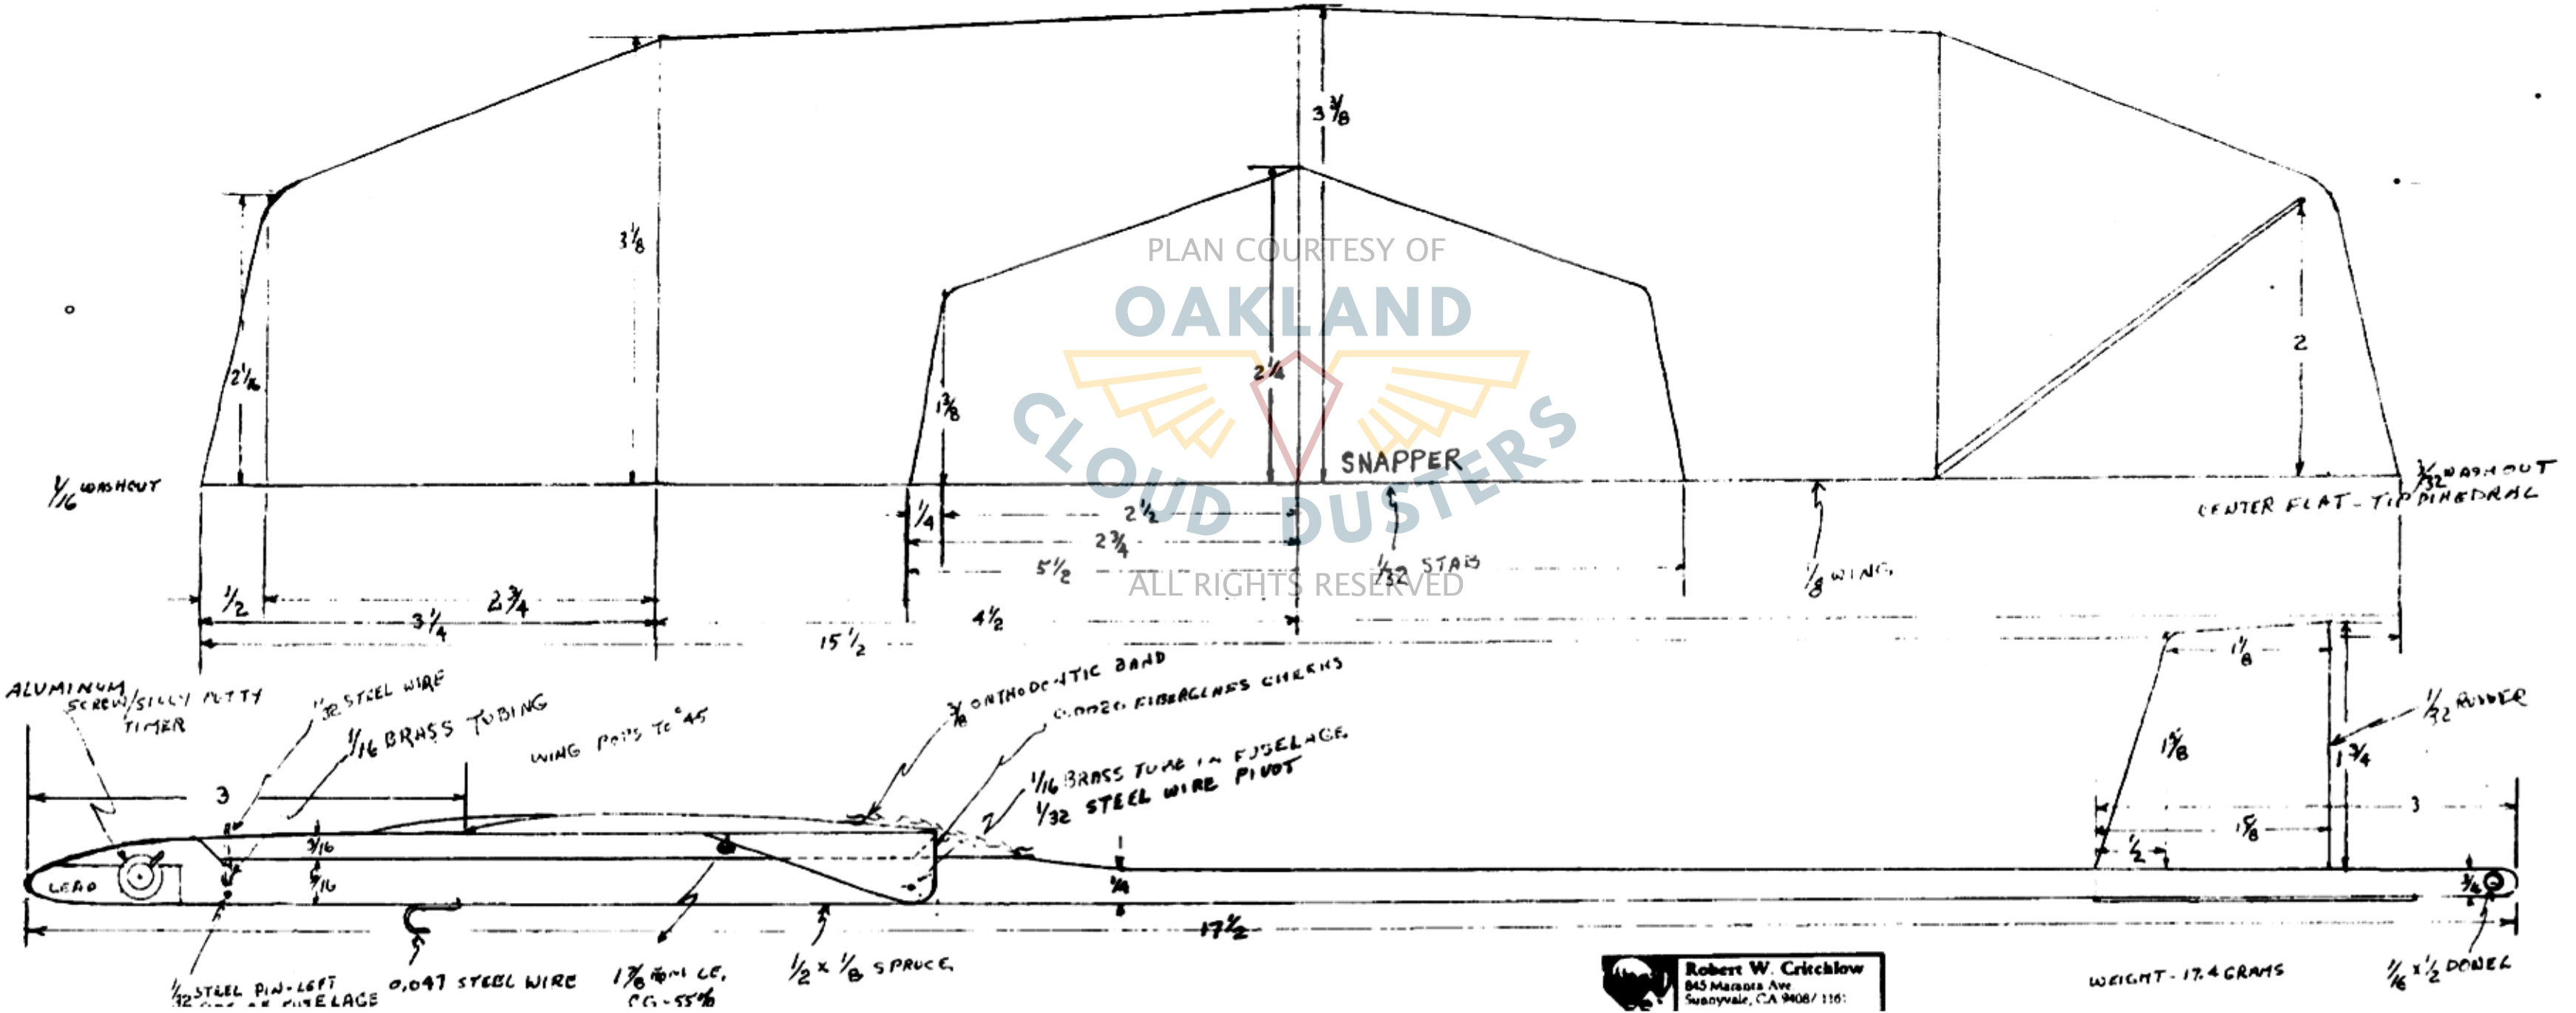

Robert W. Critchlow
 845 Marston Ave
 Sunnyvale, CA 94087 116

WEIGHT - 17.4 GRAMS